

CFB200

200 WATT WIDE INPUT DC-DC CONVERTERS SINGLE OUTPUT



Features

- 100-200W Isolated Output
- Efficiency to 85%
- 300KHz Switching Frequency
- 2 : 1 Input Range
- Regulated Outputs
- Continuous Short Circuit Protection
- Industry Standard Half-Brick Package

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		%EFF	CASE
				NO LOAD	FULL LOAD		
CFB200-48S25		2.5 VDC	40A		2.8A	74	
CFB200-48S33		3.3 VDC	40A		3.5A	79	
CFB200-48S05		5 VDC	40A		5A	83	
CFB200-48S12	36-75 VDC	12 VDC	17A	25 mA	5A	85	FB
CFB200-48S15		15 VDC	13.3A		5A	85	
CFB200-48S24		24 VDC	8.4A		5A	85	
CFB200-48S48		48 VDC	4.2A		5A	85	

NOTE : 1. Nominal Input Voltage 48 VDC

Specifications

INPUT SPECIFICATIONS:

Input Voltage Range..... 48V.....36-75V
 Undervoltage lockout 48Vin power up 34V
 48Vin power down 32.5V
 Positive Logic Remote ON/OFF ^{3,4}
 Input Filter PI Type

OUTPUT SPECIFICATIONS:

Voltage Accuracy : ±1% max.
 Transient Response :25% Step Load Change<500µ sec.
 External Trim Adj. Range±10%
 Ripple & Noise, 20MHz BW, 3.3V & 5V 40mV RMS., max.
 100mV pk-pk, max.
 12V & 15V 60mV RMS., max.
 150mV pk-pk, max.
 24V & 48V 100mV / 200mV RMS., max.
 240mV / 480mV pk-pk, max.
 Temperature Coefficient..... ±0.03%/°C
 Short Circuit Protection.....Continuous
 Line Regulation¹±0.2% max.
 Load Regulation²±0.2% max.
 Over Voltage Protection trip Range ,% Vo nom.115-140%
 Current Limit110% ~140% Nominal Output

GENERAL SPECIFICATIONS:

Efficiency.....See Table
 Isolation VoltageInput/Output..... 1500VDC min.
 Input/Case..... 1500VDC min.
 Output/Case..... 1500VDC min.
 Isolation Resistance 10⁹ ohm min.
 Switching Frequency 300KHz ,Typ.
 Operating case Temperature -40°C to 100°C
 Storage Temperature -40°C to +105°C
 Thermal Shutdown, Case Temp.100°C Typ.
 Dimensions4.60x2.40x0.50 inches
 (116.8x61.0x12.7 mm)
 Case MaterialAluminum Base with Plastic Case


NOTE:

1. Measured From High Line to Low Line.
2. Measured From Full Load to Zero Load.
3. Logic Compatibility Open Collector ref to -Input
 Module ON Open Circuit
 Module OFF < 0.8Vdc
4. Suffix "N" to the Model Number with Negative Logic Remote ON/OFF.



CASE FB

All Dimensions In Inches(mm)


Tolerances Inches .XX±.02 .XXX±.010 ±0.02 Pin
 Millimeters .X±.5 .XX±.25 ±0.5

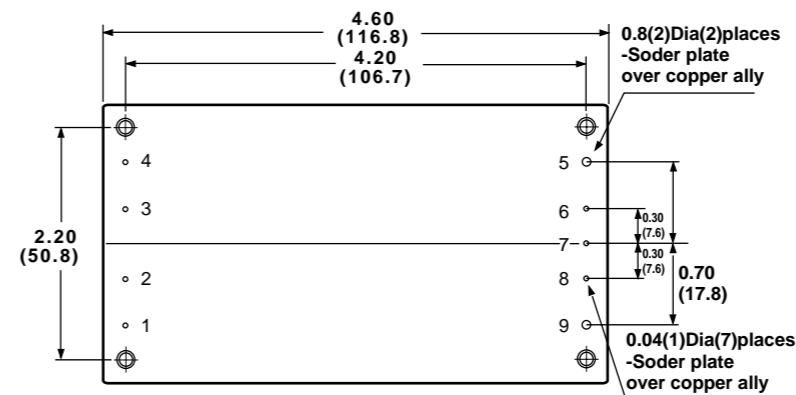


PIN CONNECTION	
Pin	Function
1.	+Vin
2.	ON/OFF
3.	NC
4.	-Vin
5.	-Vout
6.	-Sense
7.	Trim
8.	+Sense
9.	+Vout

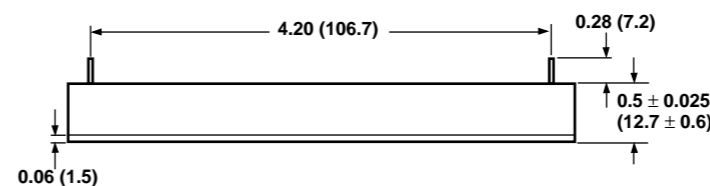

Remote ON/OFF Control

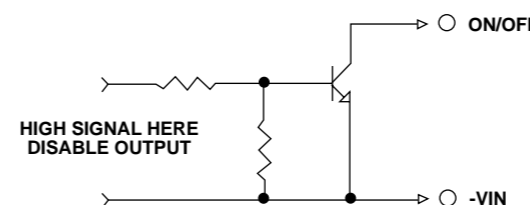

External Output Trim

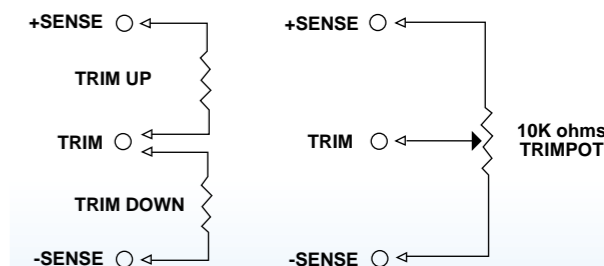


Application Note

Derating

The operating case temperature range of the CFB200 series is -40°C to +100°C. When operating the CFB200 series, proper derating or cooling is needed.

Following is the derating curve of CFB200 without heat sink; Airflow Along Width (Transverse)

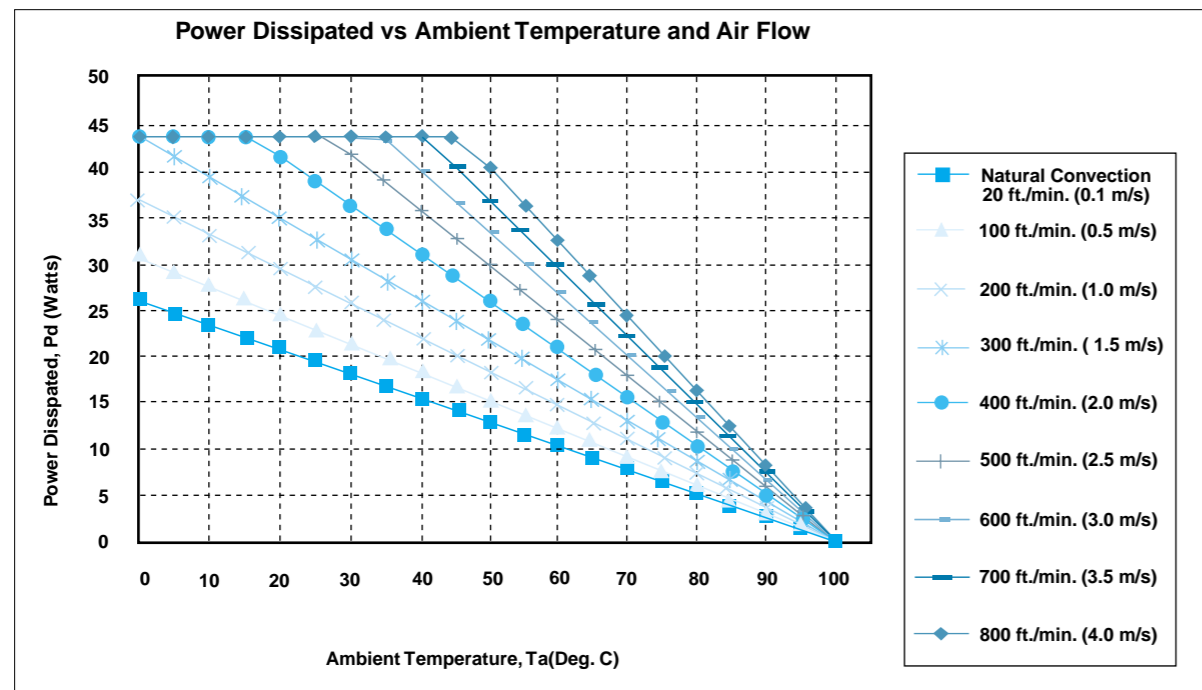

Forced Convection Power Derating with No Heat Sink; Airflow Along Width (Transverse)

Where:

The power dissipation (Pd):

$$Pd = Pi - Po = Po (1 - \eta) / \eta$$

The thermal resistance are list below:

Chart of Thermal Resistance vs Air Flow:


AIR FLOW RATE	TYPICAL Rca
Natural Convection 20ft./min. (0.1m/s)	3.82 °C/W
100 ft./min. (0.5m/s)	3.23 °C/W
200 ft./min. (1.0m/s)	2.71 °C/W
300 ft./min. (1.5m/s)	2.28 °C/W
400 ft./min. (2.0m/s)	1.92 °C/W
500 ft./min. (2.5m/s)	1.68 °C/W
600 ft./min. (3.0m/s)	1.50 °C/W
700 ft./min. (3.5m/s)	1.35 °C/W
800 ft./min. (4.0m/s)	1.23 °C/W

The temperature rise (ΔT):

$$\Delta T = Pd * Rca$$

Remote ON/OFF Control

The CFB200 Series allows the user to switch the module on and off electronically with remote on/off feature. The CFB200 Series are available in "positive logic" or "negative logic" (option).

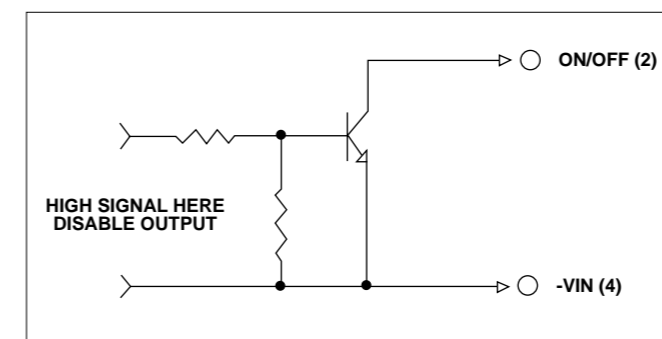


Logic Table

Logic State (Pin 2)	Negative Logic	Positive Logic
Logic Low - Switch Closed	Module on	Module off
Logic High - Switch Open	Module off	Module on

External Output Trimming


Output may optionally be externally trimmed ($\pm 10\%$) with a fixed resistor or an external trimpot as shown.

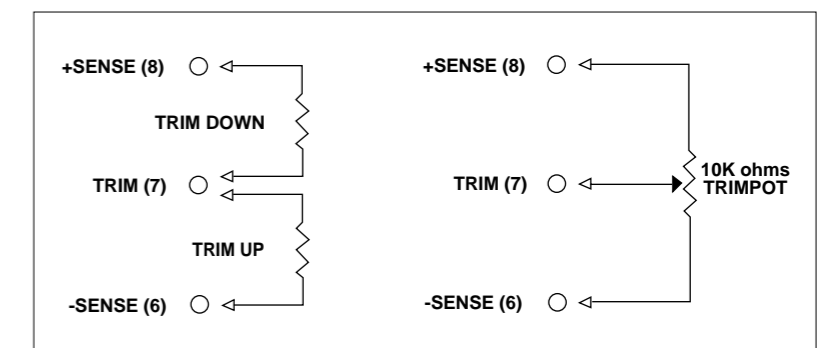

External Output

Output Noise

The output noise is measured with 10µF tantalum capacitor and 1.0µF ceramic capacitor across output.

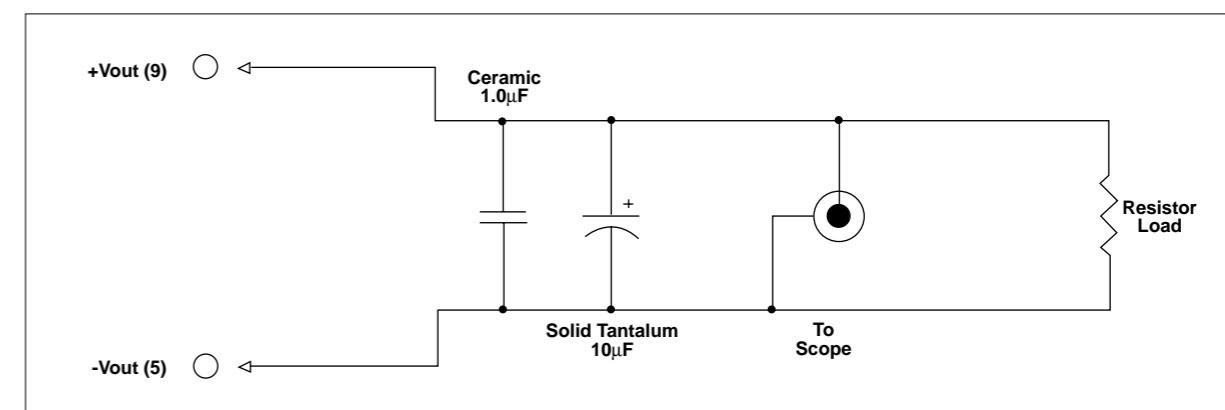

Output Noise Test Circuit schematic