




# MEAN WELL

SWITCHING POWER SUPPLY  
ISO-9001 CERTIFIED MANUFACTURER

# PD-65 SERIES


- .LOW COST, HIGH RELIABILITY
- .105°C OUTPUT CAPACITOR
- .INTERNATIONAL AC INPUT RANGE
- .HIGH EFFICIENCY, LOW WORKING TEMPERATURE
- .SOFT-START CIRCUIT, LIMITING AC SURGE CURRENT
- .SHORT CIRCUIT, OVERLOAD, OVER VOLTAGE PROTECTED
- .COMPACT SIZE, LIGHT WEIGHT
- .100% FULL LOAD BURN-IN TEST
- .BUILT IN EMI FILTER, LOW RIPPLE NOISE



MODEL	PD-65A		PD-65B	
	CH1	CH2	CH1	CH2
DC OUTPUT VOLTAGE	5V	12V	5V	24V
OUTPUT V. TOLERANCE	±4%	±7%	±4%	±7%
OUTPUT RATED CURRENT	5.5A	2.8A	3.5A	2A
OUTPUT MIN. CURRENT	0.4A	0.2A	0.4A	0.2A
OUTPUT MAX. CURRENT	7A	3.2A	6A	2.6A
RIPPLE & NOISE	50mVp-p	120mVp-p	50mVp-p	150mVp-p
LINE REGULATION	±1%	±2%	±1%	±2%
LOAD REGULATION	±3%	±4%	±3%	±4%
RATED OUTPUT POWER	61.1W		65.5W	
MAXIMUM OUTPUT POWER	RATED OUTPUT POWER FOR CONVECTION; 72W WITH 18 CFM MIN. FORCED AIR			
EFFICIENCY	78%		81%	
DC VOLTAGE ADJ.	@CH1:+10,-5%		CH1:+10,-5%	
INPUT VOLTAGE RANGE	90~264VAC 47~440Hz ; 120~370VDC			
AC CURRENT	1.5A/115V 0.9A/230V			
INRUSH CURRENT	COLD START 20A/115V 40A/230V			
LEAKAGE CURRENT	<0.5 mA			
OVERLOAD PROTECTION	73~105W OUTPUT POWER TYPE: PULSING HICCUP SHUTDOWN RESET:AUTO RECOVERY			
OVER VOLTAGE PROTECTION	5.75~6.75VDC ON CH1			
TEMP. COEFFICIENT	±0.04% / °C (0~50°C) ON +5V OUTPUT			
SETUP, RISE, HOLD UP TIME	800ms, 20ms, 20ms			
VIBRATION	10~500Hz, 2G 10min./1cycle, PERIOD FOR 60min. EACH AXES			
WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC			
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:500VDC / 100M Ohms			
WORKING TEMP., HUMIDITY	-10°C~+60°C(REFER TO OUTPUT DERATING CURVE), 20%~90% RH @ @			
STORAGE TEMP., HUMIDITY	-20°C~+85°C, 10%~95% RH			
DIMENSION	127*76.2*40mm (L*W*H) PCB ONLY			
WEIGHT	0.28Kgs			
SAFETY STANDARDS	UL1950, TUV EN60950 APPROVED			
EMC STANDARDS	CISPR22 (EN55022), IEC1000-4-2,3,4,5 IEC1000-3-2,3 VERIFICATION			


NOTE : 1.ALL PARAMETERS ARE SPECIFIED AT 230VAC INPUT, RATED LOAD, 25°C 70% RH. AMBIENT.  
 2.TOLERANCE INCLUDE SET UP TOLERANCE, LINE REGULATION, LOAD REGULATION.  
 3.RIPPLE & NOISE ARE MEASURED AT 20MHz BY USING A 12" TWISTED PAIR TERMINATED WITH A 0.1µF & 47µF CAPACITOR.  
 4.LINE REGULATION IS MEASURED FROM LOW LINE TO HIGH LINE AT RATED LOAD.  
 5.OUTPUT PROVIDE UP TO MAXIMUM CURRENT, BUT RELATED TO MAXIMUM OUTPUT POWER.  
 6.EACH OUTPUT PROVIDE UP TO MAXIMUM CURRENT, BUT TOTAL LOAD CAN NOT EXCEED MAX. OUTPUT POWER.  
 7.MOUNTING HOLES M1 AND M2 SHOULD BE GROUNDED FOR EMI PURPOSES.

## BLOCK DIAGRAM

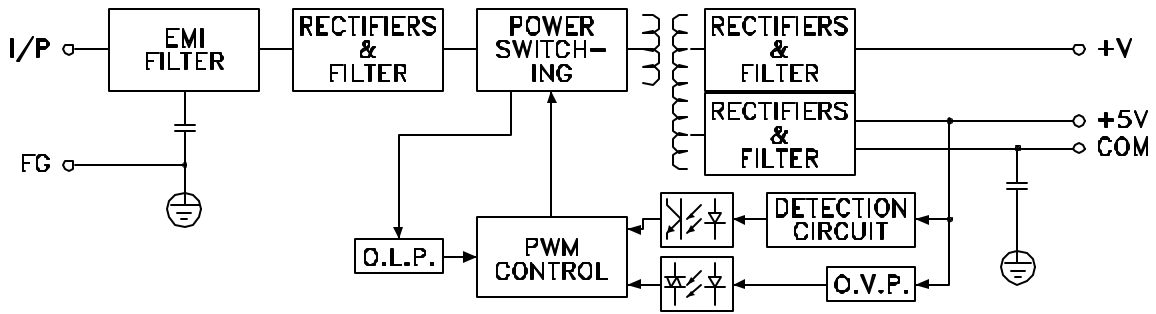


fosc : 65KHz

## OUTPUT DERATING

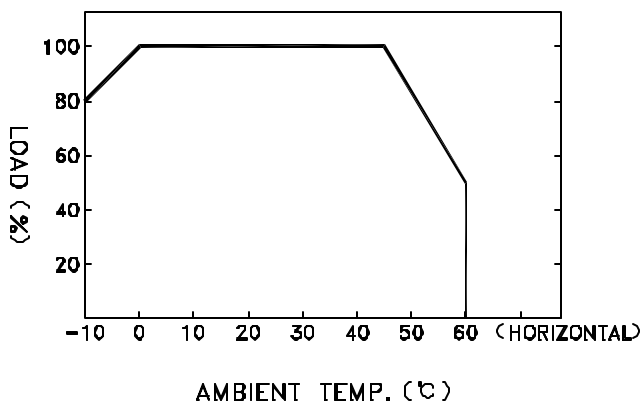

## STATIC CHARACTERISTICS

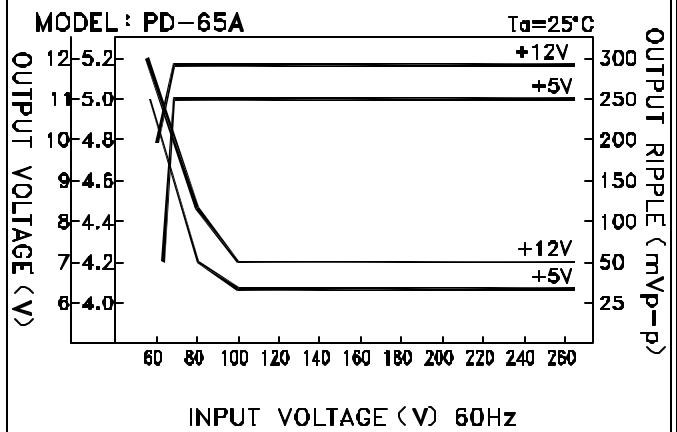

## DIMENSION (mm)

### TERMINAL PIN NO. ASSIGNMENT

- ☒ CN1 : AC INPUT
- ☒ CN2 : DC OUTPUT
- ☒ PIN 1 : DC OUTPUT +V
- ☒ PIN 2,3 : DC OUTPUT +5V
- ☒ PIN 4,5 : DC OUTPUT COM
- ☒ PIN 6 : DC OUTPUT N.C.

