


TR500

6W SWITCHING ADAPTER

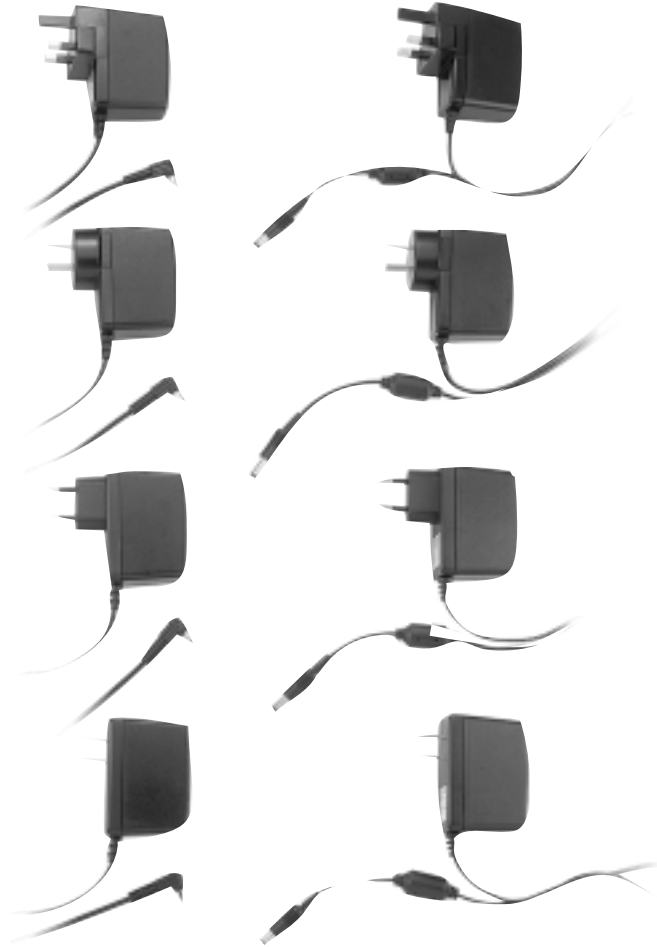

Feature

- Universal Input: 90 ~ 264Vac
- Continuous Short Circuit Protection
- Conduive EMI Meets CISPR/FCC Class B
- Low Cost

Specifications

INPUT CHARACTERISTICS:

Voltage	90 ~ 264Vac
Frequency	47 to 63Hz
Input Current	0.5A max.
Inrush Current.....	30A max. @ 264Vac

ENVIRONMENTAL CHARACTERISTICS:

Operating Temperature	0 ~ 40°C
Storage Temperature	-20 ~ 85°C

OUTPUT CHARACTERISTICS:

Hold-up Time	10mS typ. @ 115Vac
Short Circuit Protection	Continuous (Auto Recovery)
Over Current Protection	Constant Current type

MECHANICAL OUTLINE:

Dimensions	72 x 52 x 35 mm
Weight	130g

