



MEAN WELL

SWITCHING POWER SUPPLY

ISO-9001 CERTIFIED MANUFACTURER

DRP-240 SERIES


- .LOW COST, HIGH RELIABILITY
- .105°C OUTPUT CAPACITOR
- .INTERNATIONAL AC INPUT RANGE
- .HIGH EFFICIENCY, LOW WORKING TEMPERATURE
- .SOFT-START CIRCUIT, LIMITING AC SURGE CURRENT
- .SHORT CIRCUIT, OVERLOAD, OVER VOLTAGE PROTECTED
- .COMPACT SIZE, LIGHT WEIGHT
- .100% FULL LOAD BURN-IN TEST
- .BUILT IN EMI FILTER, LOW RIPPLE NOISE
- .BUILT IN PFC CIRCUIT
- .OVER TEMPERATURE PROTECTED



MODEL	DRP-240-24	DRP-240-48
SPECIFICATION		
DC OUTPUT VOLTAGE	24V	48V
OUTPUT V. TOLERANCE	±1%	±1%
OUTPUT RATED CURRENT	10A	5A
OUTPUT CURRENT RANGE	0-10A	0-5A
RIPPLE & NOISE	80mVp-p	150mVp-p
LINE REGULATION	±0.5%	±0.5%
LOAD REGULATION	±1%	±1%
DC OUTPUT POWER	240W	240W
EFFICIENCY	84%	85%
DC VOLTAGE ADJ.	24V-28V	48V-53V
INPUT VOLTAGE RANGE	85~264VAC 47~63Hz; 120~370VDC	
AC CURRENT	3.5A/115V 1.8A/230V	
POWER FACTOR	PF>0.95, PF>0.98/115VAC	
INRUSH CURRENT	COLD START 30A/115V 50A/230V	
LEAKAGE CURRENT	<3.5mA/240VAC	
OVERLOAD PROTECTION	105%~150% TYPE:CONSTANT CURRENT LIMITING RESET:AUTO RECOVERY	
OVER VOLTAGE PROTECTION	30-36V	54-60V
OVER TEMP.PROTECTION	95°C±5°C(TSW) TYPE:SHUT DOWN RESET:AUTO RECOVERY	
TEMP. COEFFICIENT	±0.03% / °C (0-50°C)	
SETUP, RISE, HOLD UP TIME	800ms;40ms; 20ms/230V,115V	
VIBRATION	10-500Hz, 2G 10min./1cycle, PERIOD FOR 60min. EACH AXES	
WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC	
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:500VDC / 100M Ohms	
WORKING TEMP., HUMIDITY	-10°C~+70°C(REFER TO OUTPUT DERATING CURVE), 20%-90% RH	
STORAGE TEMP., HUMIDITY	-20°C~+85°C, 10%-95% RH	
DIMENSION	125.5 *100 *125.2 mm (L*W*H)	
WEIGHT	1.1Kgs	
SAFETY STANDARDS	MEET TUV EN60950, UL508	
EMC STANDARDS	MEET EN55022 CLASS B ,EN61000-4-2,3,4,5,6,8,11; ENV50204 ,EN61000-3-2,-3 ,EN50082-2	


NOTE : 1.ALL PARAMETERS ARE SPECIFIED AT 230VAC INPUT, RATED LOAD, 25°C 70% RH. AMBIENT.
 2.TOLERANCE INCLUDE SET UP TOLERANCE, LINE REGULATION, LOAD REGULATION.
 3.RIPPLE & NOISE ARE MEASURED AT 20MHZ BY USING A 12" TWISTED PAIR TERMINATED WITH A 0.1uF & 47uF CAPACITOR.
 4.LINE REGULATION IS MEASURED FROM LOW LINE TO HIGH LINE AT RATED LOAD.
 5.LOAD REGULATION IS MEASURED FROM 0% TO 100% RATED LOAD.

BLOCK DIAGRAM

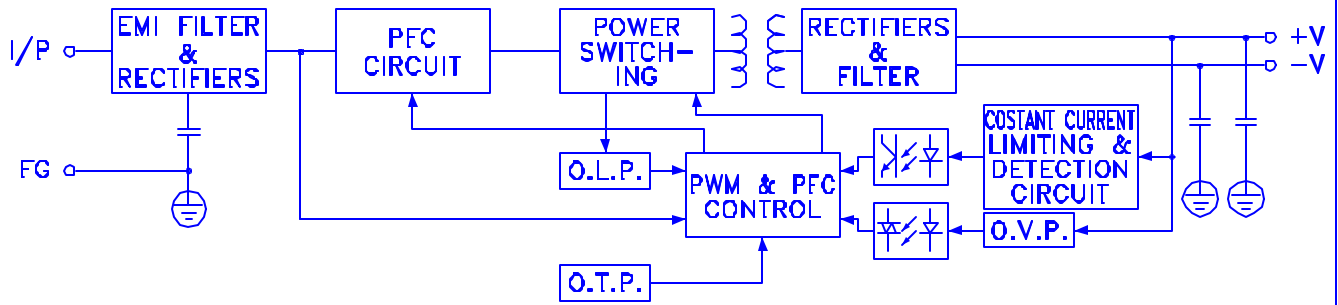


$f_{osc} = 100KHz$

OUTPUT DERATING VS T_d

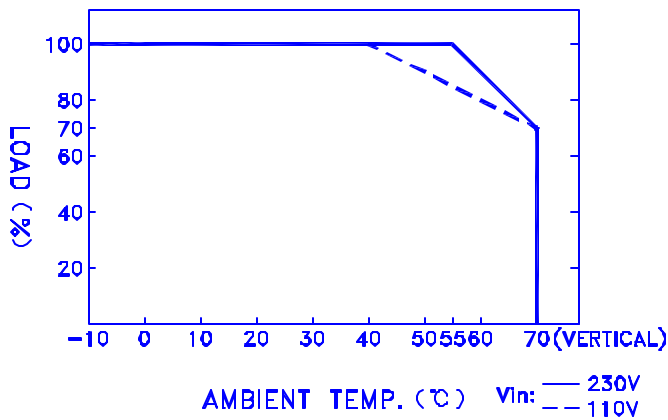

OUTPUT DERATING VS INPUT VOLTAGE

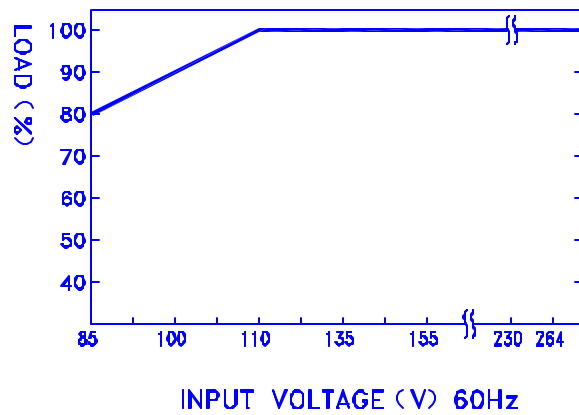

DIMENSION (mm)

☒ CASE : 922

☒ TERMINAL PIN NO. ASSIGNMENT

☒ TB1 : AC INPUT

☒ PIN 1 : \perp

☒ PIN 2 : AC/N

☒ PIN 3 : AC/L

☒ TB2 : DC OUTPUT

☒ PIN 1,2 : +V

☒ PIN 3,4 : -V

