



# MEAN WELL

## SWITCHING POWER SUPPLY

ISO-9001 CERTIFIED MANUFACTURER

# PS-25

## SERIES

- .LOW COST, HIGH RELIABILITY
- .105°C OUTPUT CAPACITOR
- .INTERNATIONAL AC INPUT RANGE
- .HIGH EFFICIENCY, LOW WORKING TEMPERATURE
- .SOFT-START CIRCUIT, LIMITING AC SURGE CURRENT
- .SHORT CIRCUIT, OVERLOAD, OVER VOLTAGE PROTECTED
- .COMPACT SIZE, LIGHT WEIGHT
- .100% FULL LOAD BURN-IN TEST
- .BUILT IN EMI FILTER, LOW RIPPLE NOISE




MODEL	PS-25-3.3	PS-25-5	PS-25-7.5	PS-25-12	PS-25-13.5	PS-25-15	PS-25-24	PS-25-27	PS-25-48
DC OUTPUT VOLTAGE	3.3V	5V	7.5V	12V	13.5V	15V	24V	27V	48V
OUTPUT V. TOLERANCE	±3%	±2%	±2%	±2%	±2%	±2%	±2%	±2%	±2%
OUTPUT RATED CURRENT	5A	5A	3.3A	2.1A	1.9A	1.7A	1A	0.9A	0.5A
OUTPUT CURRENT RANGE	0-5A	0-5A	0-3.3A	0-2.1A	0-1.9A	0-1.7A	0-1A	0-0.9A	0-0.5A
RIPPLE & NOISE	80mVp-p	80mVp-p	80mVp-p	100mVp-p	100mVp-p	100mVp-p	240mVp-p	240mVp-p	350mVp-p
LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.3%	±0.3%	±0.3%	±0.2%	±0.2%	±0.2%
LOAD REGULATION	±2.5%	±2%	±2%	±1%	±1%	±1%	±0.5%	±0.5%	±0.5%
DC OUTPUT POWER	16.5W	25W	24.8W	25.2W	25.7W	25.5W	24W	24.3W	24W
EFFICIENCY	66%	74%	76%	78%	78%	78%	79%	79%	79%
DC VOLTAGE ADJ.	-----								
INPUT VOLTAGE RANGE	85~264VAC 47~63Hz; 120~370VDC								
AC CURRENT	0.65A/115V 0.4A/230V								
INRUSH CURRENT	COLD START 40A								
LEAKAGE CURRENT	<0.5mA/240VAC								
OVERLOAD PROTECTION	ABOVE 105% TYPE:PULSING HICCUP SHUTDOWN RESET:AUTO RECOVERY								
OVER VOLTAGE PROTECTION	115%~135%								
OVER TEMP. PROTECTION	U1 Tj 135°C TYPICALLY POWER SHUTDOWN								
TEMP. COEFFICIENT	±0.03% / °C (0~50°C)								
SETUP, RISE, HOLD UP TIME	200ms, 30ms, 17ms/115VAC 200ms, 20ms, 80ms / 230VAC								
VIBRATION	10~500Hz, 2G 10min./1cycle, PERIOD FOR 60min. EACH AXES								
WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC								
ISOLATION RESISTANCE	I/P-O/P, I/P-FG:500VDC / 100M Ohms								
WORKING TEMP., HUMIDITY	-10°C~+60°C(REFER TO OUTPUT DERATING CURVE), 20%~90% RH								
STORAGE TEMP., HUMIDITY	-20°C~+85°C, 10%~95% RH								
DIMENSION	107*61*30mm								
WEIGHT	0.15Kgs								
SAFETY STANDARDS	UL1950, TUV EN60950 APPROVED								
EMC STANDARDS	CISPR22 (EN55022), IEC1000-4-2,3,4,5 IEC1000-3-2,3 VERIFICATION								

NOTE : 1.ALL PARAMETERS ARE SPECIFIED AT 230VAC INPUT, RATED LOAD, 25°C 70% RH. AMBIENT.  
 2.RIPPLE & NOISE ARE MEASURED AT 20MHz BY USING A 12" TWISTED PAIR TERMINATED WITH A 0.1uF & 47uF CAPACITOR.  
 3.LINE REGULATION IS MEASURED FROM LOW LINE TO HIGH LINE AT RATED LOAD.

# PS-25 SERIES

## BLOCK DIAGRAM

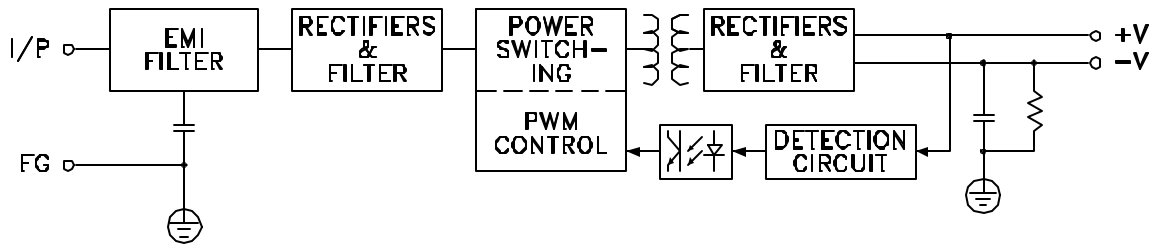


fosc : 100KHz

## OUTPUT DERATING



## STATIC CHARACTERISTICS

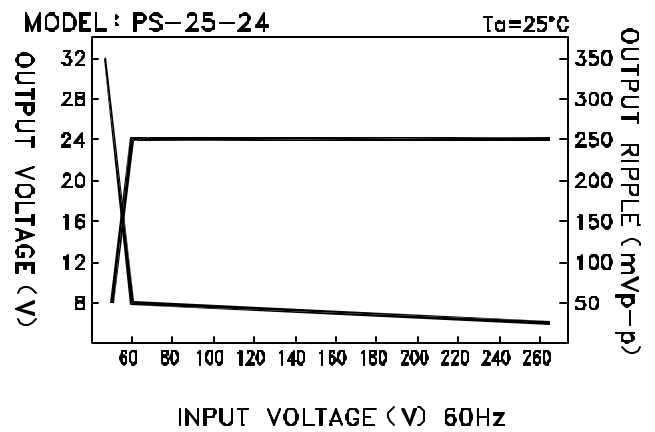

## DIMENSION:mm[inch]

- ☒ TERMINAL PIN NO. ASSIGNMENT
- ☒ CN1 : AC INPUT
- ☒ CN2 : DC OUTPUT
  - ☒ PIN 1,2 : +V
  - ☒ PIN 3,4 : -V

